




FOCUHUNTER[®]

- Thank you for buying the FOCUHUNTER Terra/Titan Series Red/Green Dot Sight. Terra/Titan has the industry standard ACRO footprint and is equipped with 1913 Picatinny mounts.



MZJ-RDP-0012




MZJ-RDP-0015

FOCUHUNTER GREEN DOT SIGHT

Gear Up, Aim True

- Suitable for both rifles and pistols, it can meet most of your usage scenarios and help you improve your shooting accuracy.



MZJ-RDP-0017



MZJ-RDP-0018

- Terra has a standard 3 MOA dot, it can easily adjust illuminated level, each uniquely designed to adapting to deffierent environments. To cycle through the illuminated level, simply hold the "+" botton and choose the one that best illuminated suits your needs.




MZJ-RDP-0012




MZJ-RDP-0017



- Titan has introduced a new multi-reticle variant to cater to users' preferences. In addition to a standard red dot, it can easily adjust two additional illuminated reticles, each uniquely designed to enhance target acquisition and accuracy. To cycle through the reticles, simply hold the "+" button for 3 seconds and choose the one that best suits your needs.




MZJ-RDP-0015




MZJ-RDP-0018



- 3 different reticle styles: Dot, Circle, Circle/Dot. The dot size is 3MOA, circle size is MZJ-RDP-0015 36MOA / MZJ-RDP-0018 36MOA. Shooters can now select from three versatile options suitable for multiple shooting scenarios!



MZJ-RDP-0015



MZJ-RDP-0018

- Parallax-free
- Motion Activation
- 6061-T6 Aluminum
- 8 Daylight & 2 Night vision
- For ACRO footprint & Picatinny rail



Operating
Temperature:
-20°C to +60°C



Shockproof
1500G



IP67
Waterproof



WARNING:

1. Do not look directly at the sun through the optic.
2. Always keep the optic, mounts, and screws away from children and pets to prevent ingestion.

MZJ-RDP-0012/0015




MZJ-RDP-0017/0018



A. Illuminated Switch
C. Windage Adjustment
E. ACRO Footprint

B. Objective Lens
D. Elevation Adjustment
F. Battery Compartment
G. Ocular Lens



- Terra/Titan RDP-0012/0015/0017/0018 is compatible with an ACRO-type cut slide, making it suitable for most handguns. Additionally, it includes low and tall-profile Picatinny mounts for mounting on shotguns and rifles, ensuring widespread compatibility.

Motion Activation

- If the optic is not bumped or moved for 225 ± 20 seconds, the dot will turn off and the optic will enter a low-power state, extending battery life. When the optic is bumped or moved, the dot will immediately power on and return to the previously selected brightness and reticle.



- Crafted from 6061-T6 Aluminum Housing with an IP67 waterproof and 1500G shockproof design.



- Lens with Zero Distortion, Crystal clear multicoated lens.
- 1 MOA per click adjustment.
- Parallax-free to 33 yards with unlimited eye relief.

- 1. The Red Dot Sights have unlimited eye relief which means you can mount the sight at any distance from your eye if you feel comfortable and have the desired field of view you needed. You certainly do not want to mount it too close to your eye as you want to be sure that the distance between the sight and your eye is long enough to prevent any potential injury caused by recoil from your firearm.
- 2. Once you find the position, just tighten the mount on the base or rail on top of your rifle. If you aren't confident with your abilities, do not possess an inch-pound torque wrench, or are unsure of the mounting process, consider having a local gunsmith complete the task at a reasonable cost.

Installing The Battery


- See the Parts Guide **on page 7 and 13** for the location of the battery compartment.

CAUTION: Installing the battery incorrectly may damage the internal contacts.

Ensure that the **positive (+)** side faces up and the **negative (-)** side down.



- Brightness settings 1 and 2 are night vision-compatible with settings 3 to 8 for low-light and indoor applications, leaving settings 9 and 10 ideal for daylight shooting.

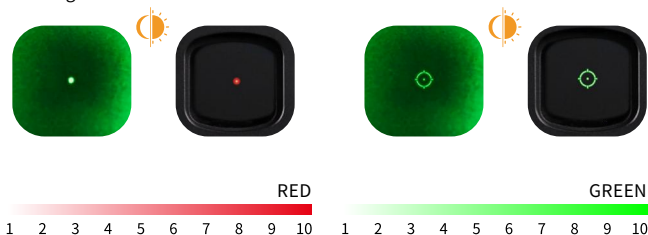

⚠ NOTE: You need to activate the function by turning on the sight, and the function will deactivate when the sight is turned off.

- **CAUTION:** When replacing the battery cover, ensure the O-ring is present and not damaged. Failure to do so could result in water leakage into the battery compartment.
- Verify that the red dot is on and functional by switching the power on and increasing the brightness if necessary (see “Switching Power On/Off”, and “Adjusting Dot Brightness” **on page 11**).

Replacing The Battery

- Should your reticle grow dim or not light at all, replace the battery, following the installation procedure described above.
- **Memory function:** The sight will remember the last saved brightness setting when powered on and off.
- **Low battery Warning:** If the battery voltage is below 2.6 Vdc, the light will not change, please replace the battery in time.
- **Note:** If you disable the timer, manually turn the power off before storing the sight away or when not using it for long periods, to prevent draining the battery.



MZJ-RDP-0012/0015

The side-loading tray
Battery model: CR2032




MZJ-RDP-0017/0018

The side-loading tray
Battery model: CR2032

- **Note:** The battery provides an estimated 50000 hours of battery life at mid-range brightness settings .

- Power on: Press “+” button. (see on page 7, 11 Parts Guide)
Power off: Press and hold the “-” button for 3 seconds.
- Sleep Mode: By default, the sight will automatically switch power off (not shutdown) after 225 ± 20 seconds of inactivity to extend battery life, no button press required, shake to wake.
- Reticle Switch: Press and hold the “+” button for 3 seconds. (MZJ-RDP-0015/0018 Only)
- Increase brightness: Press the “+” button.
- Decrease brightness: Press the “-” button.



- Before installation, confirm the firearm is unloaded

MZJ-RDP-0012/0015/0017/0018



- 1. This sight has been factory-adjusted to an approximate 33-yard zero.
- 2. The Elevation adjustment is located on top of the tail section of the housing and the Windage adjustment is located on the right side of the housing. Adjustment can be performed by inserting the flat-tipped end of the included tool into the turret slot and rotating it. (**See page 7**)
- 3. Windage and Elevation adjustments are 1 MOA per click.
- 4. The maximum adjustment range is 90MOA from the center.

- The external optical surfaces should occasionally be wiped clean.
- The optical lenses are multicoated optical glass. When cleaning the lenses, blow away any dust on the surface, wet the lens with lens cleaner or clean water, then wipe away smudges with lens tissue, soft cotton, or a microfiber cloth. Avoid touching the glass surface with dry cloth or tissue paper. Do not use organic solvents such as alcohol or ac.

PACKAGE CONTENTS

Gear Up, Aim True

| Item No.: MZJ-RDP- | 0012 | 0015 | 0017 | 0018 |
|----------------------|------|------|------|------|
| Red /Green Dot Sight | x 1 | x 1 | x 1 | x 1 |
| Low Picatinny Mount | x 1 | x 1 | x 1 | x 1 |
| High Picatinny Mount | x 1 | x 1 | x 1 | x 1 |
| Adjustment Tool | x 1 | x 1 | x 1 | x 1 |
| T10 Tools | x 1 | x 1 | x 1 | x 1 |
| Lens Cloth | x 1 | x 1 | x 1 | x 1 |



FOCUHUNTER®

Guangzhou MiaoZhun Jie Trade Co., Ltd.

Website: www.focuhunteroptics.com / www.mzjtrade.com

Tel: +86-020-86539317

Email: focuhunteroptics@gmail.com

ADD.: Room A204, 37 Innovation Park, No.19 Honglou Road, Liwan Dist.,
Guangzhou, Guangdong, China