



FOCUHUNTER[®]


FOCUHUNTER RED DOT SIGHT

Gear Up, Aim True

- Thank you for buying the FOCUHUNTER Talent Series Red Dot Sight. Talent suitable for Glock MOS (G17, G19, G20, G21, G22, G23, G34, G35, G40, G41, G45, G47) direct mounting of optical red dots. No adapter plate required. (DOES NOT WORK WITH G43X OR G48 MOS)



MZJ-RDP-0016



MZJ-RDP-0039

- Talent has a standard 3 MOA dot, it can easily adjust illuminated level, each uniquely designed to adapting to defferent environments. To cycle through the illuminated level, simply hold the "▲" botton and choose the one that best illuminated suits your needs.




MZJ-RDP-0016




MZJ-RDP-0039



- 3 different reticle styles: Dot, Circle, Circle/Dot. The dot size is 3MOA, circle size is 36MOA (MZJ-RDP-0039) . Shooters can now select from three versatile options suitable for multiple shooting scenarios!



MZJ-RDP-0016



MZJ-RDP-0039

FEATURES

Gear Up, Aim True

- 6061-T6 Aluminum
- Motion Activation
- Parallax-free at 33 yards
- 8 Daylight & 2 Night Vision
- Lower 1/3 Co-Witness for quick targeting
- Wide field of view with low-profile design
- Direct on Glock MOS, no adapter plate required



Operating
Temperature:
-20°C to +40°C



Shockproof
1500G



IPX7
Waterproof



WARNING:

1. Do not look directly at the sun through the optic.
2. Always keep the optic, mounts, and screws away from children and pets to prevent ingestion.

MZJ-RDP-0016/0039



- A. Illuminated Switch
- C. Windage Adjustment
- E. Glock MOS Footprint

- B. Objective Lens
- D. Elevation Adjustment
- F. Battery Compartment



- As the name implies, “Lower 1/3 co-witness sights” can make you aim at the target quickly and accurately without obstructing the field of view too much. This is accomplished by placing your optical sight directly on the Glock MOS. Using a lower 1/3 co-witness leaves you with a less cluttered sight and gives you optimal visibility when using your red dot.



NO-WITNESSCO



LOWER 1/3
CO-WITNESS



ABSOLUTE
CO-WITNESS

- Talent RDP-0016/0039 is compatible with GLOCK MOS cut slide, making it suitable for most GLOCK.

Motion Activation

- If the optic is not bumped or moved for 225 ± 15 seconds, the dot will turn off and the optic will enter a low-power state, extending battery life. When the optic is bumped or moved, the dot will immediately power on and return to the previously selected brightness and reticle.



- Featuring a 6061-T6 aluminum alloy case, IPX7 waterproof and 1500G shockproof design, with a Lower 1/3 Co-Witness GLOCK MOS dedicated optical red dot for enhanced shock and drop protection in the field.



- Lens with Zero Distortion, Crystal clear multicoated lens.
- 1 MOA per click adjustment.
- Parallax-free to 33 yards with unlimited eye relief.

- 1. The Red Dot Sights have unlimited eye relief which means you can mount the sight at any distance from your eye if you feel comfortable and have the desired field of view you needed. You certainly do not want to mount it too close to your eye as you want to be sure that the distance between the sight and your eye is long enough to prevent any potential injury caused by recoil from your firearm.
- 2. Once you find the position, just tighten the mount on the base or rail on top of your rifle. If you aren't confident with your abilities, do not possess an inch-pound torque wrench, or are unsure of the mounting process, consider having a local gunsmith complete the task at a reasonable cost.

Installing The Battery


- See the Parts Guide **on page 5 and 13** for the location of the battery compartment.

CAUTION: Installing the battery incorrectly may damage the internal contacts.

Ensure that the **positive (+)** side faces up and the **negative (-)** side down.



- Brightness settings 1 and 2 are night vision-compatible with settings 3 to 8 for low-light and indoor applications, leaving settings 9 and 10 ideal for daylight shooting.

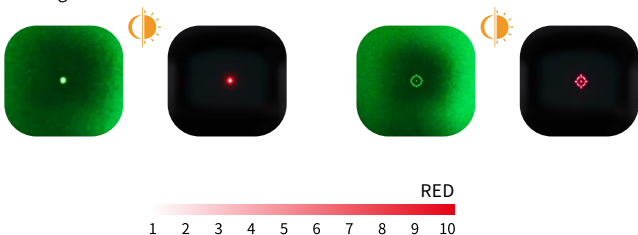

NOTE: You need to activate the function by turning on the sight, and the function will deactivate when the sight is turned off.

- **CAUTION:** When replacing the battery cover, ensure the O-ring is present and not damaged. Failure to do so could result in water leakage into the battery compartment.
- Verify that the red dot is on and functional by switching the power on and increasing the brightness if necessary (see “Switching Power On/Off”, and “Adjusting Dot Brightness” on page 10 and 13).

Replacing The Battery

- Should your reticle grow dim or not light at all, replace the battery, following the installation procedure described above.
- **Memory function:** The sight will remember the last saved brightness setting when powered on and off.
- **Low battery Warning:** If the battery voltage is below 2.6 Vdc, the light will not change, please replace the battery in time.
- **Note:** If you disable the timer, manually turn the power off before storing the sight away or when not using it for long periods, to prevent draining the battery.



MZJ-RDP-0016/0039
The side-loading tray
Battery model: CR1620

- **Note:** The battery provides an estimated 50000 hours of battery life at mid-range brightness settings .

- Power on: Press “▲” button. (see on page 5, 10 Parts Guide)
Power off: Press and hold the “▼” button for 3 seconds.
- Sleep Mode: By default, the sight will automatically switch power off (not shutdown) after 225 ± 15 seconds of inactivity to extend battery life, no button press required, shake to wake.
- Reticle Switch: Press and hold the “▲” button for 3 seconds.
(MZJ-RDP-0039 Only)
- Increase brightness: Press the “▲” button.
- Decrease brightness: Press the “▼” button.



- Before installation, confirm the firearm is unloaded

MZJ-RDP-0016/0039



Elevation Adjust



Windage Adjust

- 1. This sight has been factory-adjusted to an approximate 33-yard zero.
- 2. The Elevation adjustment is located on top of the tail section of the housing and the Windage adjustment is located on the right side of the housing. Adjustment can be performed by inserting the flat-tipped end of the included tool into the turret slot and rotating it. (**See page 14**)
- 3. Windage and Elevation adjustments are 1 MOA per click.
- 4. The maximum adjustment range is 80MOA from the center.

- The external optical surfaces should occasionally be wiped clean.
- The optical lenses are multicoated optical glass. When cleaning the lenses, blow away any dust on the surface, wet the lens with lens cleaner or clean water, then wipe away smudges with lens tissue, soft cotton, or a microfiber cloth. Avoid touching the glass surface with dry cloth or tissue paper. Do not use organic solvents such as alcohol or ac.

PACKAGE CONTENTS

Gear Up, Aim True

Item No.: MZJ-RDP-	0016	0039
GLOCK MOS Red Dot Sight	x 1	x 1
MOS screws	x 2	x 2
Adjustment Tool	x 1	x 1
T10 Tools	x 1	x 1
Lens Cloth	x 1	x 1



FOCUHUNTER®

Guangzhou MiaoZhun Jie Trade Co., Ltd.

Website: www.focuhunteroptics.com / www.mzjtrade.com

Tel: +86-020-86539317

Email: focuhunteroptics@gmail.com

ADD.: Room A204, 37 Innovation Park, No.19 Honglou Road, Liwan Dist.,
Guangzhou, Guangdong, China